
# MECHANICAL CONNECTORS



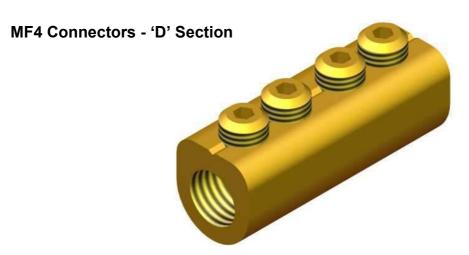

# **Principle Application:**

Stranded and solid shaped service conductors.

### Range:

		Core C.S.A. (mm <sup>2</sup> )		
Product Reference	Туре	Min	Max	
MF4/1	Straight Through		16	
MF4/3	Moisture Blocked	6*		
MF4/2	Straight Through		50	
MF4/4	Moisture Blocked	16		
MF4/9	Straight Through			
MF4/10	Moisture Blocked	16	70	
MF4/11*	Straight Through	Single/Three Phase CNE Wires ≤ 35		
MF4/12	Straight Through	6*	16	
MF4/13	Straight Through	16	50	
MF4/17	Moisture Blocked	25	70+	
MF4/18	Moisture Blocked	16	70	
MF4/19	Straight Through	6* 16		
MF4/19XL	Straight Through	6*	16	

Note: For jointing other core configurations/sizes please contact Sicame Engineering Dept

The **Hepworth MF4** range of mechanical connectors are designed for straight connections on stranded or solid service cables. The ferrules are manufactured in brass for suitability of jointing either copper/aluminium, sector/circular shaped conductor cores.



Straight Mechanical Ferrule

# MECHANICAL CONNECTORS

#### MF4 Connectors - 'D' Section

## **Secondary Application:**

Stranded and solid circular conductors.

#### Range:

Duadasat	_	Maximum Core C.S.A. (mm <sup>2</sup> )		
Product Reference	Туре	Solid	Stranded	
MF4/1	Straight Through		35	
MF4/3	Moisture Blocked	35		
MF4/2	Straight Through			
MF4/4	Moisture Blocked	70	50	
MF4/9	Straight Through		70	
MF4/10	Moisture Blocked	95		
MF4/11*	Straight Through	See overleaf		
MF4/12	Straight Through	35	35	
MF4/13	Straight Through	70	50	
MF4/17	Moisture Blocked		70+	
MF4/18	Moisture Blocked	95		
MF4/19	Straight Through	35	35	
MF4/19XL	Straight Through	35	35	

<sup>\*</sup> Note: Conductors below 6mm² should be doubled and, if necessary, doubled again to

#### Material:

Copper Alloy


### **Test Specifications:**


BS4579: Pt 1: 1970, BS4579: Pt 3: 1976

#### **Fitting Instructions:**

- 1. Cut the service cables to length and strip the core insulation equal to half the length of connector + 3mm.
- 2. Thoroughly abrade all conductors to be jointed.
- 3. Align cores within connector and tighten screws on each side of the connector consecutively, until tight.







\* MF4/11 - 2 x Grub

Product	Dimensions (mm)				
Reference	'A'	'B'	,C,	'D'	
MF4/1	35.0	14.0	11.7	3.0	
MF4/2	45.0	17.0	16.0	3.0	
MF4/3	44.0	14.0	11.7	3.0	
MF4/4	55.0	17.0	16.0	3.0	
MF4/9	45.0	17.0	16.0	3.0	
MF4/10	55.0	17.0	16.0	3.0	
MF4/11*	26.0	17.0	16.0	3.0	
MF4/12	55.0	14.0	11.7	3.0	
MF4/13	55.0	17.0	16.0	3.0	
MF4/17	55.0	19.0	18.0	3.0	
MF4/18	55.0	19.0	18.0	3.0	
MF4/19	84.0	14.0	11.7	3.0	
MF4/19XL	110.0	14.0	11.7	3.0	

