

AFFLEX LSOH H05Z1Z1-F

The easy strip low smoke zero halogen flex




**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick

+44 (0) 191 410 4292

www.powerandcables.com

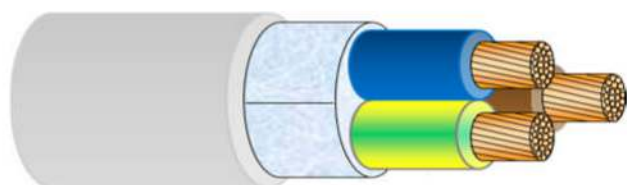

CABLE DESCRIPTION

Conductor

Stranded copper class 5 according to IEC 60228

Insulation

Thermoplastic compound LSOH, type TI 6.

Separator

Easy strip tape to ensure quick and effortless sheath removal

Outer Sheath

White Thermoplastic compound, LSOH, type TM 7

Technical Data

Reference Standards EN 50525-3-11

Service temperature -10 + 70 °C

Rated voltage 300/500 V

AC Voltage test, 5 min at 2.0kV

Bending radius 4D

Key Features

- > Genuine FLEX (EN 50525-1)
- > Easy strip sheath: no sticking or jamming
- > Genuine low smoke, zero halogen and flame retardant

Fire Performance

- > Flame retardant: UNE EN 60332-1-2, IEC 60332-1-2
- > Fire retardant: UNE EN 60332-3-24, IEC 60332-3-24
- > Zero Halogen: UNE EN 50267-2-1, IEC 60754-1
- > Low Smoke: UNE EN 61034-2, IEC 61034-2
- > Acidic and corrosive gases: UNE EN 50267-2-2, IEC 60754-2

Approvals

- > HAR approved AENOR: EN 50525-3-11

Core Identification

Harmonised - standard

- ○ brown-blue
- ○ ○ brown-blue-green/yellow
- ○ ○ ○ brown-black-grey-green/yellow
- ○ ○ ○ ○ brown-black-grey-blue-green/yellow



Temperature
Range
-10 to 70 °C



Bending Radius
Fixed r=4D



Mechanical Impact
Medium



Fire Performance
UNE EN 60332-1-2
UNE EN 60332-3-24



Flexibility
Flexible



Halogen Free
UNE EN 50267-2-2



Low Smoke Emissions
UNE EN 61034-2

Nominal Cross Sectional Area mm ²	Insulation Thickness mm	Nominal Outer Sheath Thickness mm	Approx. Outer Diameter mm	Approx. Weight kg/km	Prysmian Code
--	-------------------------	-----------------------------------	---------------------------	----------------------	---------------

Two Core

0.75	0.6	0.8	6.5	60	20163901
1.0	0.6	0.8	6.7	65	20163874

Three Core

0.75	0.6	0.8	6.8	70	20163902
1.0	0.6	0.8	7.1	78	20163875
1.5	0.7	0.9	8.3	107	20163876
2.5	0.8	1.1	10.1	167	20163880
4.0	0.8	1.2	11.3	227	20163881

Four Core

0.75	0.6	0.8	7.4	84	20163903
1.0	0.6	0.9	7.9	98	20163877
1.5	0.7	1.0	9.3	135	20163878
2.5	0.8	1.1	11.1	203	20163879
4.0	0.8	1.2	12.4	278	20163882

Five Core

0.75	0.6	0.9	8.3	103	20163904
------	-----	-----	-----	-----	----------

Current Rating

BS7671 Table 4F3A and 4F3B



Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com