




**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

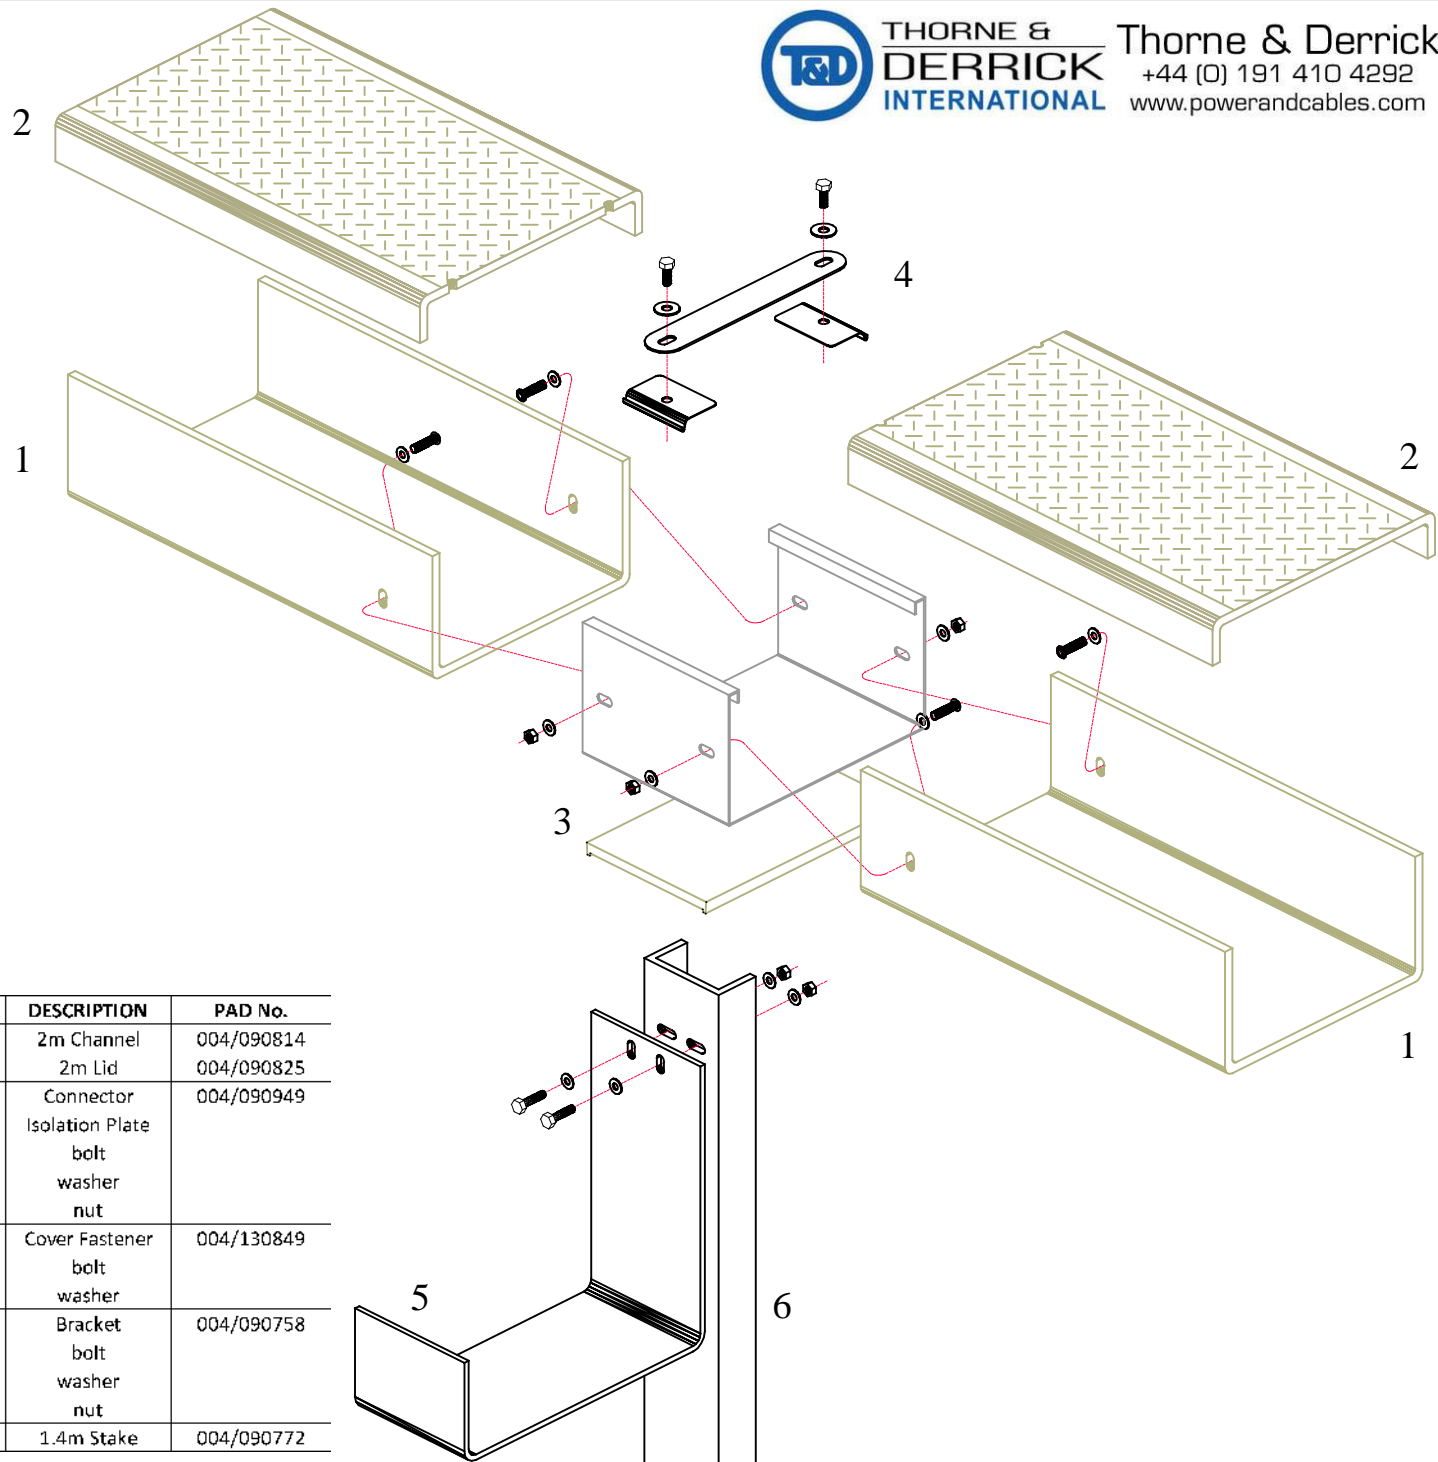

1. Do not scale.
2. This drawing is the property of BCM GRC Ltd and may not be copied altered or distributed without the consent of BCM GRC Ltd.
3. Tolerances -3mm/+3mm.
4. All cast in sockets are stainless steel, therefore stainless steel bolts are required in all cases. Isolation washers will need to be implemented where galvanised steel occurs.
5. Torque setting for standard M8 ST/ST cast in sockets is 10.6Nm.

NOTES

Ref.	BCM CODE	DESCRIPTION	PAD No.
1	BCMC/1/10A	2m Channel	004/090814
2	BCMC/1/10CPLA	2m Lid	004/090825
3	BCMC/10/30MCA BCMC/02/10	Connector Isolation Plate	004/090949
	4xBCMC-F-M8/20 BHS	bolt	
	8xBCMC-F-M8/25 RW	washer	
	4xBCMC-F-M8NN	nut	
4	BCMC/10/30CF 2xBCMC-F-M8/20 SB 2xBCMC-F-M8/25 RW	Cover Fastener bolt washer	004/130849
5	BCMC/10/30BA 2xBCMC-F-M8/25 SB gl 4xBCMC-F-M8/25RW gl 2xBCMC-F-M8NN gl	Bracket bolt washer nut	004/090758
6	BCMC/10/01SA	1.4m Stake	004/090772

Rev	Description	Date
-----	-------------	------

Drawing Title
**C/1/10 GRC Elevated Channel
Troughing Component Detail**

Dwg Status: **INFORMATION** Date: **7/11/13**

Product code: **C.A** Drawn By:

Scale: **NTS** Dwg No: **BCMC/1/10-Detail** Rev: **-**