




**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

1. Do not scale.
2. This drawing is the property of BCM GRC Ltd and may not be copied altered or distributed without the consent of BCM GRC Ltd.
3. Tolerances -3mm/+3mm.
4. All cast in sockets are stainless steel, therefore stainless steel bolts are required in all cases. Isolation washers will need to be implemented where galvanised steel occurs.
5. Torque setting for standard M8 ST/ST cast in sockets is 10.6Nm.

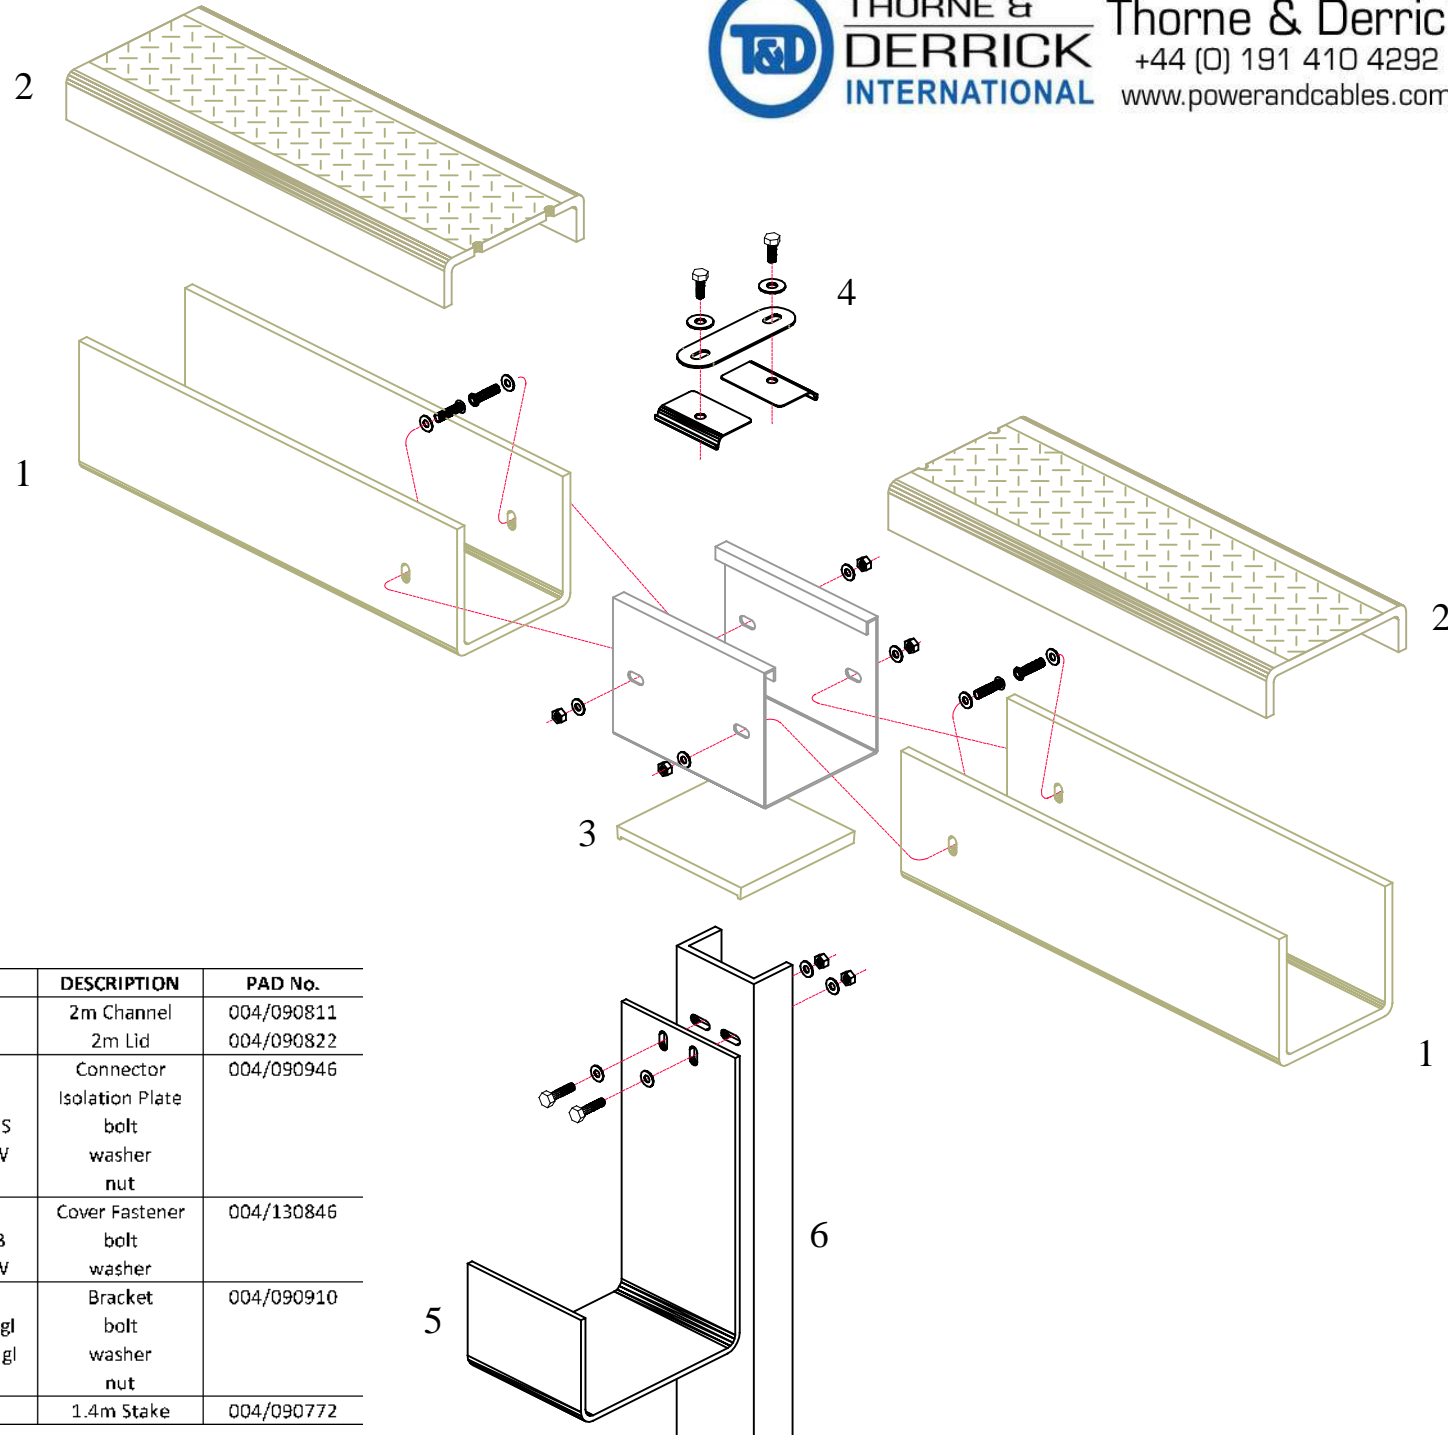

Ref.	BCM CODE	DESCRIPTION	PAD No.
1	BCM/1/7A	2m Channel	004/090811
2	BCM/1/7CPLA	2m Lid	004/090822
3	BCM/10/27MCA BCM/02/27	Connector Isolation Plate	004/090946
	4xBCM-F-M8/20 BHS	bolt	
	8xBCM-F-M8/25 RW	washer	
	4xBCM-F-M8NN	nut	
4	BCM/10/27CF 2xBCM-F-M8/20 SB 2xBCM-F-M8/25 RW	Cover Fastener bolt washer	004/130846
5	BCM/10/27BA 2xBCM-F-M8/25 SB gl 4xBCM-F-M8/25RW gl 2xBCM-F-M8NN gl	Bracket bolt washer nut	004/090910
6	BCM/10/01SA	1.4m Stake	004/090772

NOTES

Rev	Description	Date

Drawing Title

C/1/7 GRC Elevated Channel
Troughing Component Detail

Dwg Status:	INFORMATION	Date:	7/11/13
-------------	-------------	-------	---------

Product code:	C.A	Drawn By:	C.A
---------------	-----	-----------	-----

Scale:	NTS	Dwg No:	BCM/1/7-Detail	Rev:	-
--------	-----	---------	----------------	------	---