




**THORNE &  
DERRICK  
INTERNATIONAL**

**Thorne & Derrick**  
+44 (0) 191 410 4292  
www.powerandcables.com

**MC040SLF**  
single phase cut out

fused products MC040SLF

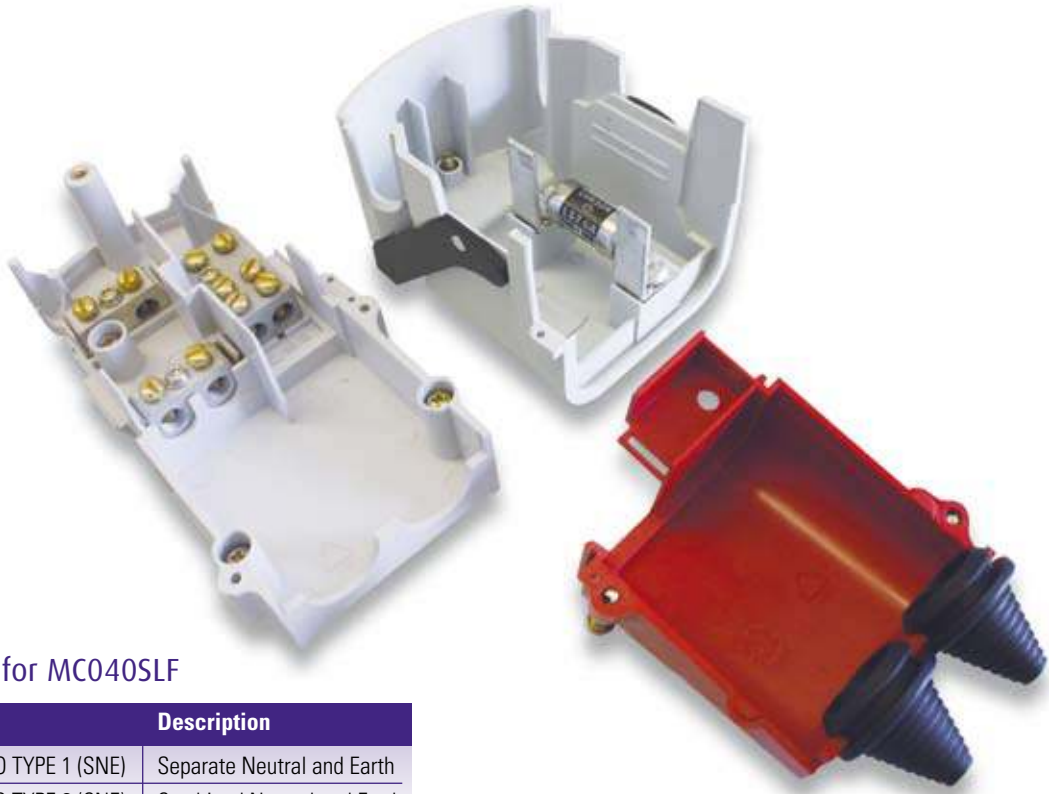

**Order details for MC040SLF**

Order code	Description
MC040SLF 25A SLCO TYPE 1 (SNE)	Separate Neutral and Earth
MC040SLF 25A SLCO TYPE 2 (CNE)	Combined Neutral and Earth

Fuses to fit the MC040SLF are obtainable under the following part numbers:

LST2 AMP	LST10 AMP	LST25 AMP
LST4 AMP	LST16 AMP	
LST6 AMP	LST20 AMP	

**Specification**

Designed and tested in accordance with BS 7654:1997  
25A maximum fuse rating  
Accepts fuse links to BS 88 Part 1, AC 16 tag type  
IP22 rating  
Single Pole isolation  
Single fuse  
Electroplated brass terminals with serrated bores  
Maximum cable size; 16mm<sup>2</sup> stranded copper or 25mm<sup>2</sup> solid aluminium conductors

Cable entry via PVC grommets as standard  
Outgoing cables exit below horizontal to form drip loop  
Sealing wire facility

**Dimensions**

Height 150mm  
Width 76mm  
Depth 60mm



LST fuse

