



Section

MV Insulation

Application

Field
Laboratory



PRODUCT BENEFITS

Set the length of insulation to be removed thanks to the thrust (BR)

TOOL CAPACITY

Diameter 14 - 40 mm
0,551 - 1,575 inch

Insulation thickness capacity 9 mm / 0,354 in


TOOL DIMENSIONS

Length	270 mm
Width	100 mm
Height	165 mm
Weight without box	1,1 Kg
Packaging	None

Tool to remove primary insulation

TO DO WHAT

The BRMRD1E enables the user to set the length and remove the insulation with a straight and neat cut on MV cables

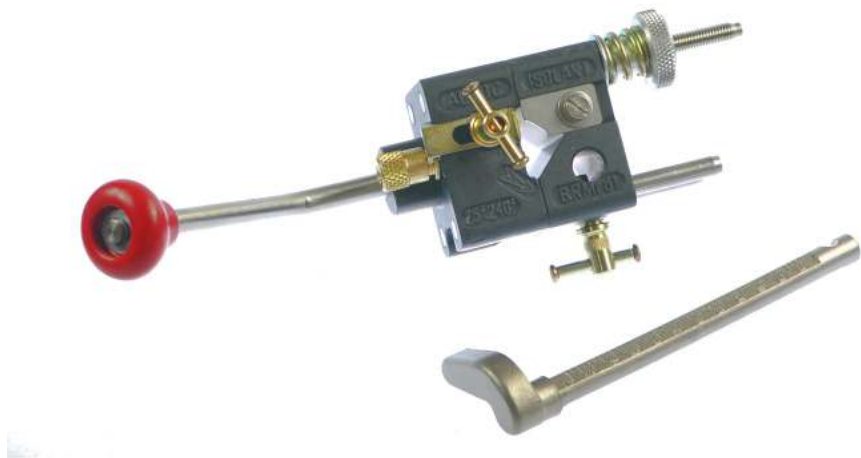

Options

SGM - Large size pouch

Spare part

- LMF2 - Spare blade for primary insulation
- BR - Thrust to set the length of insulation to be remove
- VBB1 - Screw for locking the thrust
- PCR - Quick set up right angled 45° handle
- VBL1 - Screw for locking the blade LMF2

Associated tool

- LHA - Tool to chamfer insulation
- MF2/40 - Multifunction tool for outer sheath and insulation
- ASC25 R1 - Tools to remove the bonded semiconductor with chamfer



**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

MV cables Tools

BRMRD1E



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Insulation thickness capacity	Length	Width	Height	
BRMRD1E	14 - 40 mm 0,551 - 1,575 in	9 mm / 0,354 in	270 mm 10,630 in	100 mm 3,937 in	165 mm 6,496 in	none



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com